


LED FLUORESCENT TUBE DATA SHEET

PARAMETER	UNIT	VALUE
VOLTAGE	V	AC 85V-265V
POWER RATING	W	22W/1.5m, 18W/1.2m, 9W/0.6m
LENGTH	mm	1500mm, 1200mm, 600mm
LUMINOUS FLUX	Lm	1900lm/1.5m, 1500lm/1.2m, 750lm/0.6m
FREQUENCY	Hz	50/60
COLOR TEMPERATURE	K	4500K, 6500K OR CUSTOMER SPECIFIED.
LIGHT SOURCE		SUPER BRIGHT SMD LED
LIFESPAN	HOUR	50000
TUBE DIAMETER	mm	25.4(T8)
TUBE MATERIAL		ALUMINIUM HOUSING, HIGH-TRANSPANRENCY PC COVER
WORK TEMPERATURE	℃	-30~60
BEAM ANGLE	DEGREE	120/180
CERTIFICATES		ROHS, CE(EMC, LVD)
LED QUANTITY.	PCS	450PCS/1.5M, 360PCS/1.2M, 174PCS/0.6M

WIRING DIAGRAM:

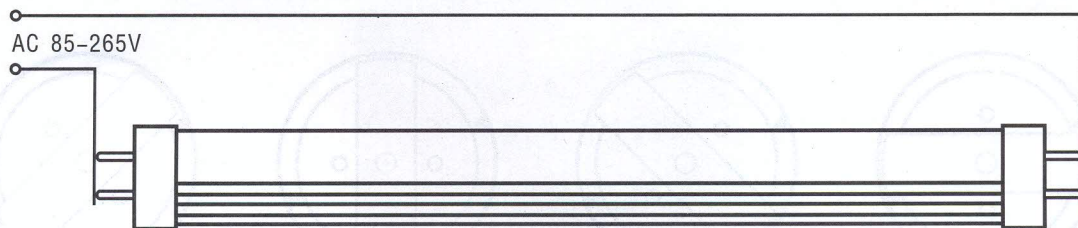

WARNING:

**THIS PRODUCT MUST NOT WORK WITH
STARTER AND ELECTRONIC BALLAST**