




GENERIC DIAGRAM

VELBUS Control

24V DC Motor 3



24V DC Motor 2

24V DC Motor 1

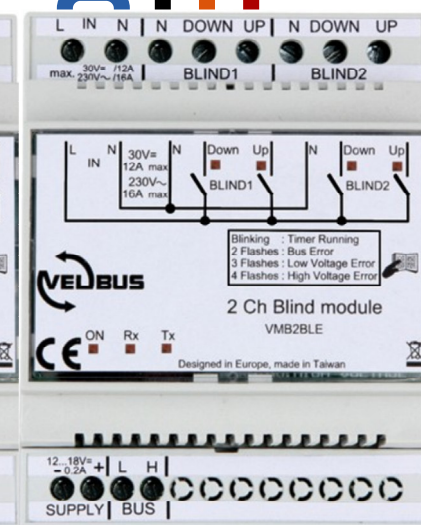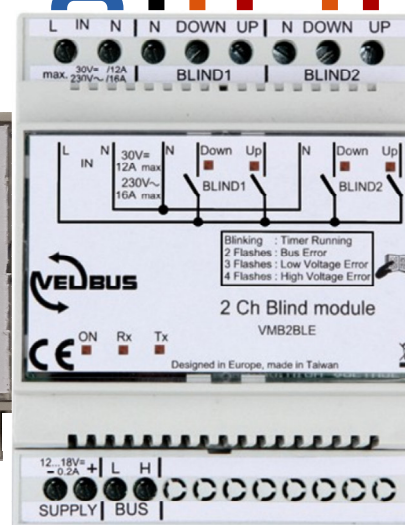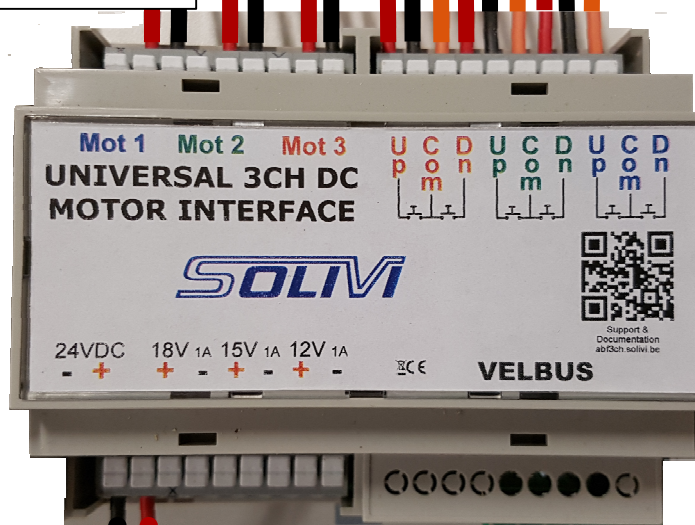

24 VDC power supply

- Needs Isolation class II
- Sufficient capacity to drive the sum of all loads +20%
- Ripple & Noise : Max 150mVp-p
- Protected against Overload / Overvoltage / Over temperature
- Use preferably SDR10024

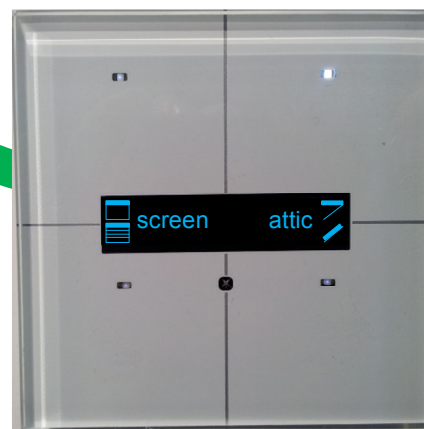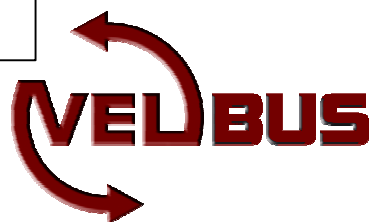

Glass Touch switches

- 32-button multi touch keys
- Fully customizable OLED display
- Free Velbuslink software
- Smartphone / Tablet / PC with VMBHIS

